

ELFO Home Lift




THE DEPOSITE OF THE PARTY OF TH

Elevation Technologies

E.P. ELEVATORI PREMONTATI srl

20 years' experience, in the lift business, offering a professional and passionate service for all our clients

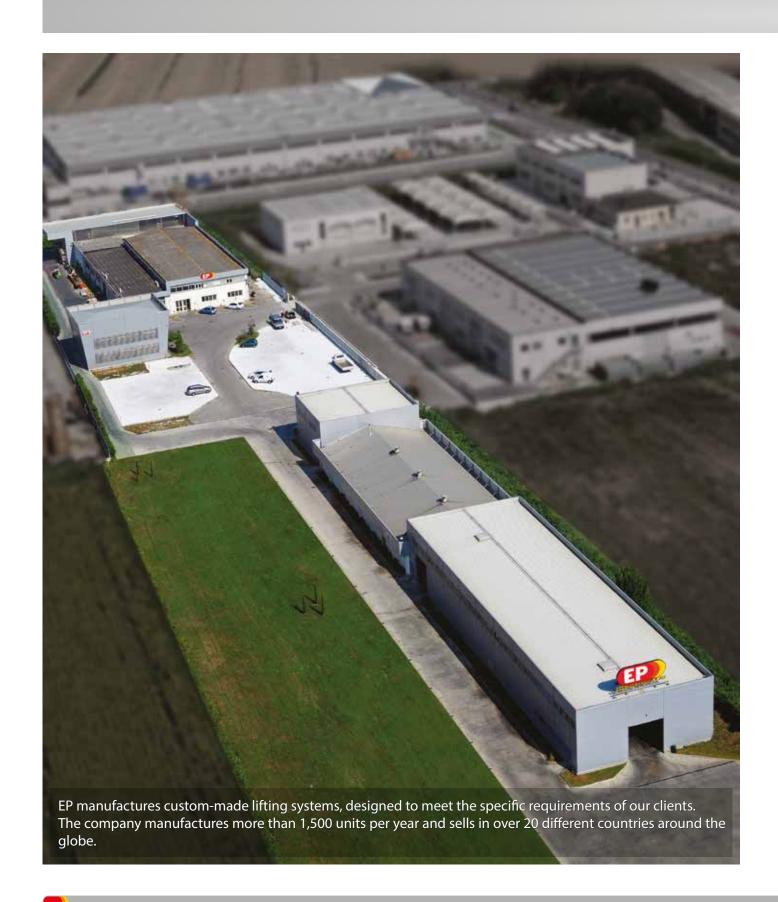

Platforms Lifts

Responding to every need of vertical transportation, platform lifts (also called Home Lifts, Minilifts, Villalifts) arose historically as an aid to overcome architectural barriers, for installations in both public and private sectors. Over the years these products have evolved and their use has spread to buildings of all types, including external installations in glass or steel shafts. This type of installations in houses, apartments, condominiums and commercial locations increases the value of the property.

Compared to the elevators, the installation of Platform Lifts provides more simple and less restrictive rules. The space required in the pit (bottom) and the headroom (top) are particularly reduced. Similarly, in the plant room. The platforms are able to use the most of the space available (especially the versions without cabin doors). Current rules differentiate elevators from platform lifts for speed which for the latter is limited to 15 centimeters per second.

These features combined with low power consumption and power supply 230V (for versions up to 400 Kg capacity) make the platform lifts the most widely used and rationale for residential locations.

EP produces two types of platform lifts:

- Elfo
- Upper


Elfo is the best-selling platform in Italy and is characterized by the presence of the cabin. Its design philosophy makes it very flexible for installation in any type of space.

Upper is created for those cases where the headroom is limited and due to the use of a gate on the top floor and the absence of the cabin, allows overall height to the top floor of only 1300 mm.



The equipment and accessories may vary because of legal or local market requirements. The informations contained in this publication is only for exemplar purposes. EP may modify the data described in this publication for technical or commercial reasons.

Elfo

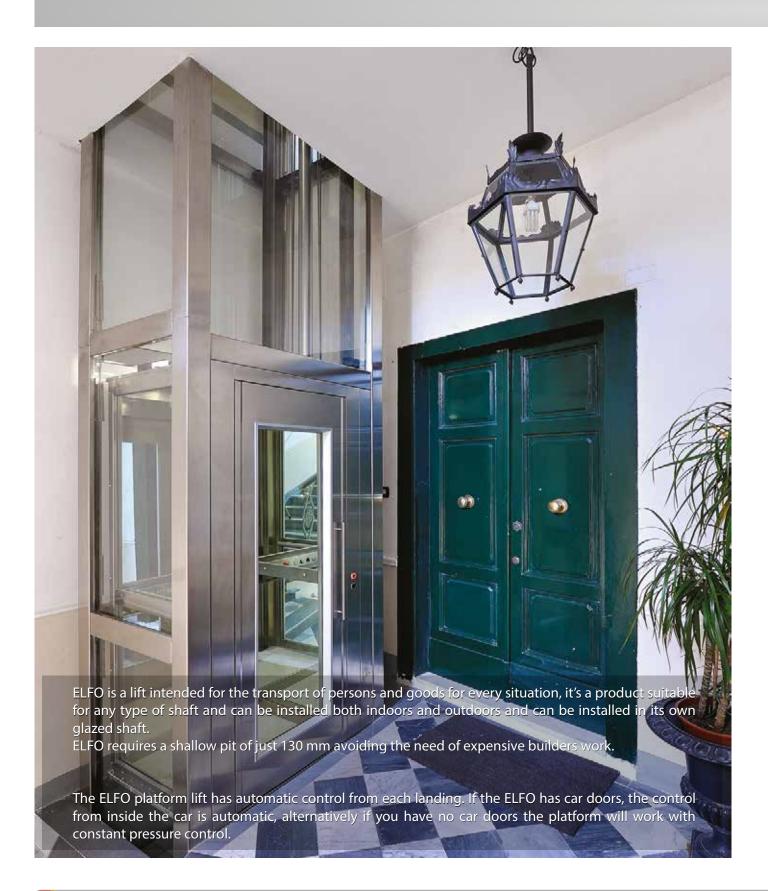


Elfo

Unit with structure

EP platforms can be supplied with a steel structure to be installed either inside or outside the building. Structures are built in stainless steel or plain steel (galvanized for outdoor installations) painted in any RAL colour.



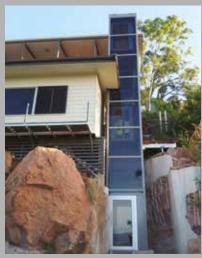

Cabin Finishes

The wide range of accessories, profiles, skirtings, lighting and mirrors allows you to choose among 40,000 combinations, making your Elfo a unique and original piece of equipment.





Aesthetical

The great flexibility and the care for aesthetical details make ELFO a truly interior design piece, becoming the perfect solution for commercial and residential installations.






Elfo

masonry shaft

ELFO is a hydraulic platform lift for the transport of persons and goods. The ease of installation and the meticulous attention to detail makes ELFO an extremely safe and durable machine.

Maintenance and power consumption is extremely low. It runs on a power supply of only 230V.

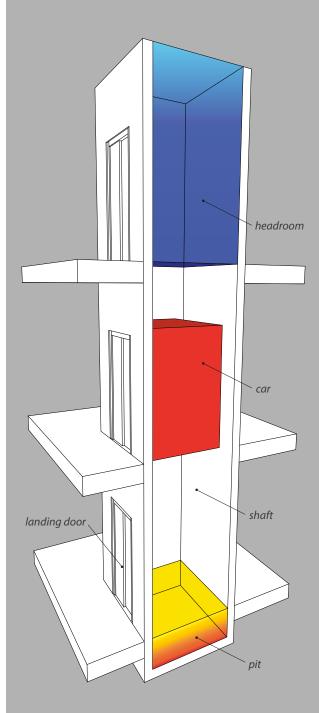




Elfo in masonry shaft with swing panoramic door covered in stainless steel with Caspim handle.

Elfo can be supplied with a lockable cabinet for the equipment up to 10 metres away from the shaft.





Elfo

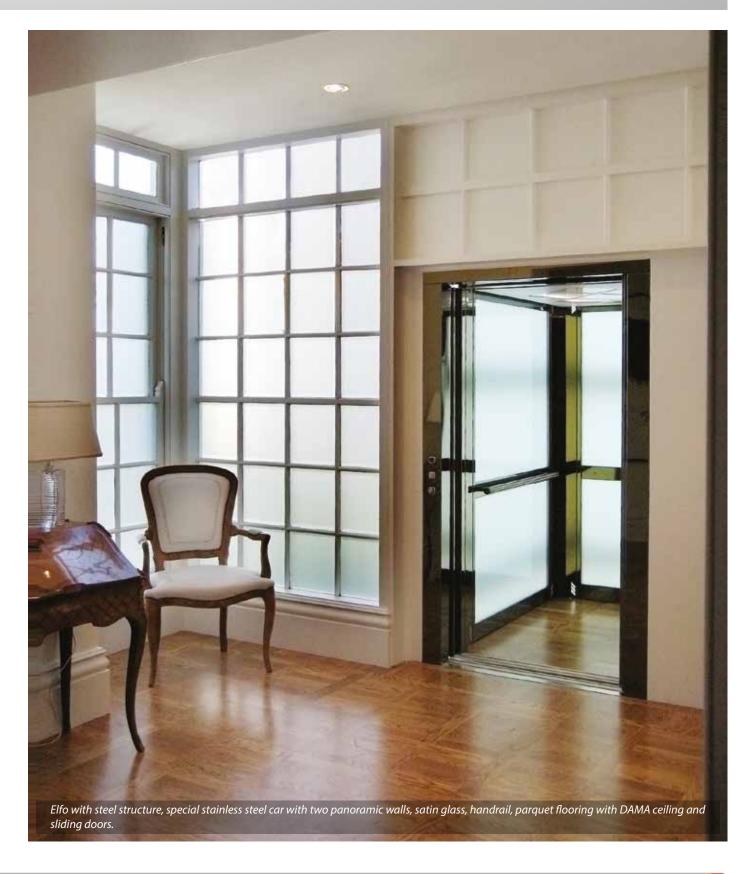

Elfo

steel structure shaft

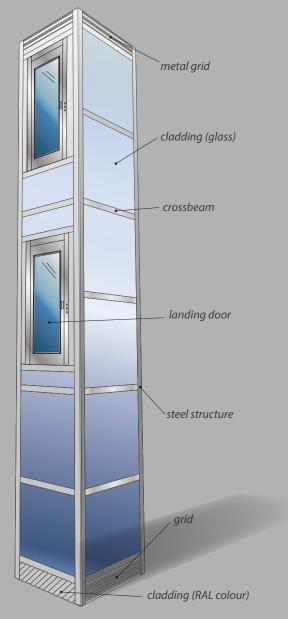

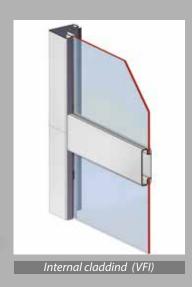















Etched neutral

Stop-Sol (Smoke/Bronze) White milk

Bronze

Smoke

Elfo









Elfo

swing manual landing doors without car doors



The lifting platform without car doors represents the cheapest and most functional solution of the Elfo model.

Installation supplied with this car uses all available space in favour of internal dimensions, allowing the same loading capacity.

The absence of car doors makes the access sides more "panoramic".

On the access side the safety photocell is always installed.

Type of control

Automatic control to landings



Hold to run control from the car










swing manual landing doors without car doors

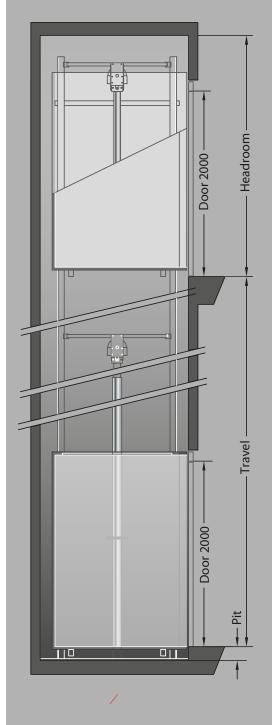

	Capacity [Kg]	standard	300¹	400¹
	Speed [m/s]	standard	0,15	0,15
	Power [Kw]	nominal	1,5/1,8	1,5/1,8/2,2
	Power supply [V]	standard	230	230
	Certification	IMQ	2006/42/CE	2006/42/CE


Shaft dimensions	Travel [mm]	max.	15850 ÷ 18250²	13450 ÷ 16650²
	Pit [mm]	min.	130³	130³
	Headroom [mm]	min./standard	2150⁴/2600⁵	2150⁴/2600⁵

²The maximum travel is based on the car load for travel > 15850 (300 Kg) and 13450 (400 kg) it's necessary to have a feasibility report

³ With Granit flooring or flooring by the costumer minimum pit is 150 mm

⁴ With roof carter 2200mmm

⁵ For headroom under to 2600 mm it's necessary the use of a safety "false head" device (safety device for installers as well as maintenance personnel)





Internal car dimensions	L Car [mm]	min.	-	590	
	L Car [IIIII]	max.		1400	
difficitions	P Car [mm]	min.		590	
	r Cai [iiiiii]	max. — 1200			
	Surface [mm]	min.		0,35	
	Surface [IIIII]	max. — 1,54			
	with Headroom [mm]	from 2150 to 2299		≥2300	
	H Car [mm]	2000		2100	


Elfo - Examples


car without doors - masonry shaft


Each Elfo lifting platform is customized, the drawings below represents only some of the possible solutions. EP may modify the models described in this publication for technical or commercial reasons.



























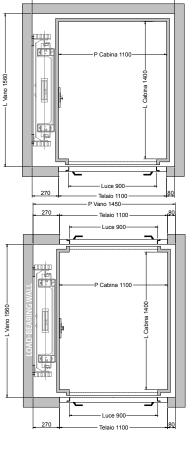



Drawings not to scale – measurements in millimetres


car without doors - steel structure shaft


Each Elfo lifting platform is customized, the drawings below represents only some of the possible solutions.


EP may modify the models described in this publication for technical or commercial reasons.



















P Cabina 1100










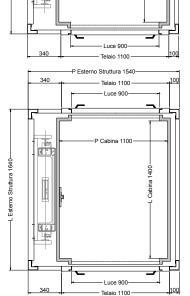

Elfo

automatic folding car doors and swing manual landing doors

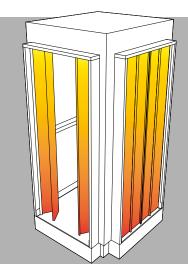

This type of solution offers the use of manual or automatic folding doors.

The presence of car doors enables the use of the unit in two different ways:

- automatic control if car doors are closed
- hold to run control (only with manual doors) if car doors are left open. In this case the safety photocell is present on the car entrance.

The folding doors are available in powder coated RAL or Stainless Stee BA / SB ("polished" or "brushed").

Type of control

Elfo with manual folding car doors and with swing manual landing doors

<u>Automatic</u> control to landings



Control from the car



hold to run with car doors open



automatic control with car doors close



Elfo with automatic folding car doors and with swing manual landing doors

Automatic control from car and landings










Elfo

automatic folding car doors and swing manual landing doors

In this configuration, Elfo Home Lift, is in available with capacities ranging from 300 kg to 1000 kg

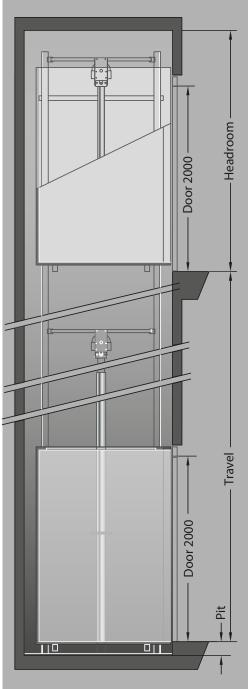


Technical characteristics	Capacity [Kg]	standard	300¹	400¹	
	Speed [m/s]	standard	0,15	0,15	
	Power [Kw]	nominal	1,5/1,8/2,2	1,5/1,8/2,2	
	Power supply [v]	standard	230	230	
ı		Certification	IMQ	2006/42/CE	2006/42/CE

¹ Capacities up to 1200 ka are available on requesi

Schaft dimensions	Travel [mm]		max. 15850 ÷ 18250² 13450 ÷ 16		13450 ÷ 16650²
	Pit [mm]		min.	130³	130³
	Headroom [mm]	min./std.		2150⁴/2600⁵ 2350/2600⁵	2150 ⁴ /2600 ⁵ 2350/2600 ⁵

²The maximum travel is based on the car load for travel > 15850 (300 Kg) and 13450 (400 kg) it's necessary to have a feasibility report

⁵ For headroom under to 2600 mm it's necessary the use of a safety "false head" device (safety device fo installers as well as maintenance personnel)



Inte	rnal car
dim	ensions

L Car [mm]	min.	590
L Car [illin]	max.	1400
P Car [mm]	min.	590
r Cai [iiiii]	max.	1200
Surface [mm]		0,35
Surface [mm]		1,54
with Headroom [mm]	from 2150 to 2299	≥2300
H Car [mm]	2000	2100
H car's door [mm]	1900	2000


³ With Granit flooring or flooring by the costumer minimum pit is 150 mm


⁴ With roof carter 2200mmm


Elfo - Examples


car with folding doors - masonry shaft


Each Elfo lifting platform is customized, the drawings below represents only some of the possible solutions. EP may modify the models described in this publication for technical or commercial reasons.



































car with folding doors - steel structure shaft


Each Elfo lifting platform is customized, the drawings below represents only some of the possible solutions.


EP may modify the models described in this publication for technical or commercial reasons.

































Elfo

with car and landing sliding doors

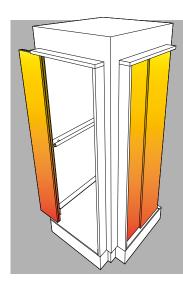

The car with automatic sliding doors combines the latest in comfort (as conventional lifts) with the advantage of the lifting platforms regulations (low maintenance costs and reduced pit and headroom).

The installation of sliding doors allows the "automatic control" of the unit:

The user can use the platform as a conventional lift just select the desired landing and you arrive at the floor.

Sliding doors are available in plastic-coated sheet, coated stainless steel SB or BA, and can be glazed or plastic laminate covered.

Type of control

Automatic control from landings and car










with car and landing sliding doors

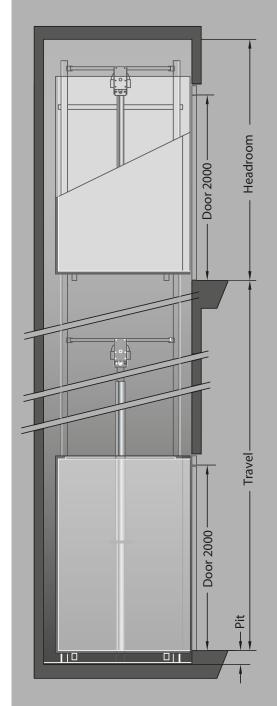


	Capacity [Kg]	standard	300	400
	Speed [m/s]	standard	0,15	0,15
	Power [Kw]	nominal	1,5/1,8/2,2	1,5/1,8/2,2
	Power supply [V]	standard	230	230
	Certification	IMQ	2006/42/CE	2006/42/CE

Schaft dimensions	Travel [mm]	max.	15850 ÷ 18250¹	13450 ÷ 16650¹
	Pit [mm]	min.	130²	130²
	Headroom [mm]	min./standard	2500/2800³	2500/2800³

¹ The maximum travel is based on the car load for travel > 15850 (300 Kg) and 13450 (400 kg) it's necessary to have a feasibility report

² With Granit flooring or flooring by the costumer minimum pit is 150 mm

³ For headroom under to 2600 mm it's necessary the use of a safety "false head" device (safety device for installers as well as maintenance personnel)




Internal car dimensions	L Car [mm]	min.	-	800
	L Car (min)	max.		1400
difficitions	P Car [mm]	min.		800
	r Car [mm]	max.		1200
	Surface [mm]	min.		0,64
	Surface [mm]	max		1,54
	H Car [mm]	standard		2100
	H Door [mm]	standard		2000

Elfo - Examples

car with sliding doors - masonry shaft


Each Elfo lifting platform is customized, the drawings below represents only some of the possible solutions. EP may modify the models described in this publication for technical or commercial reasons.

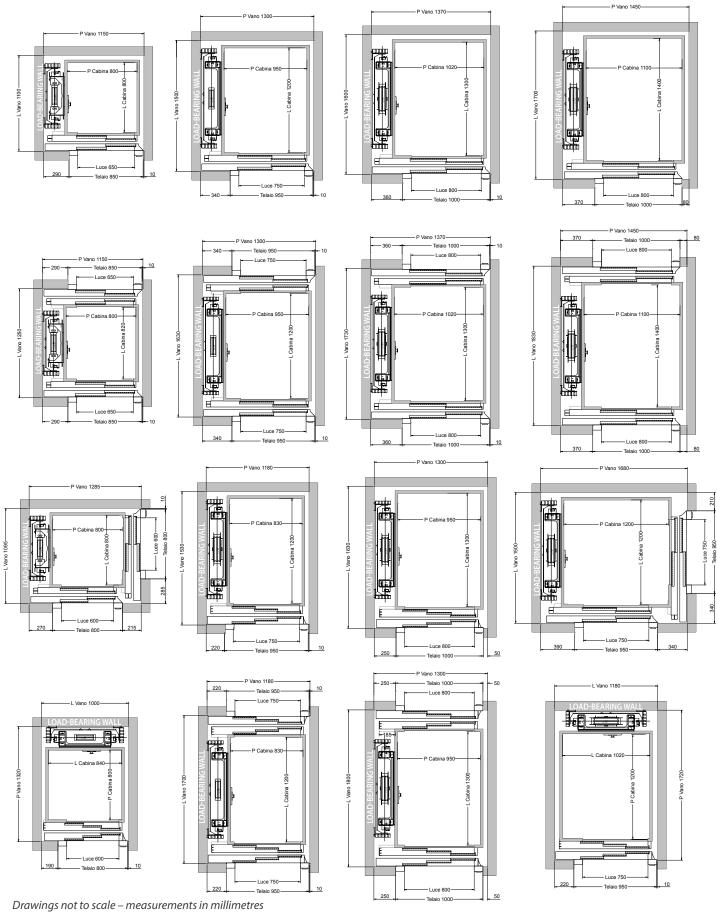

car with sliding doors - steel structure shaft

Each Elfo lifting platform is customized, the drawings below represents only some of the possible solutions.

EP may modify the models described in this publication for technical or commercial reasons.

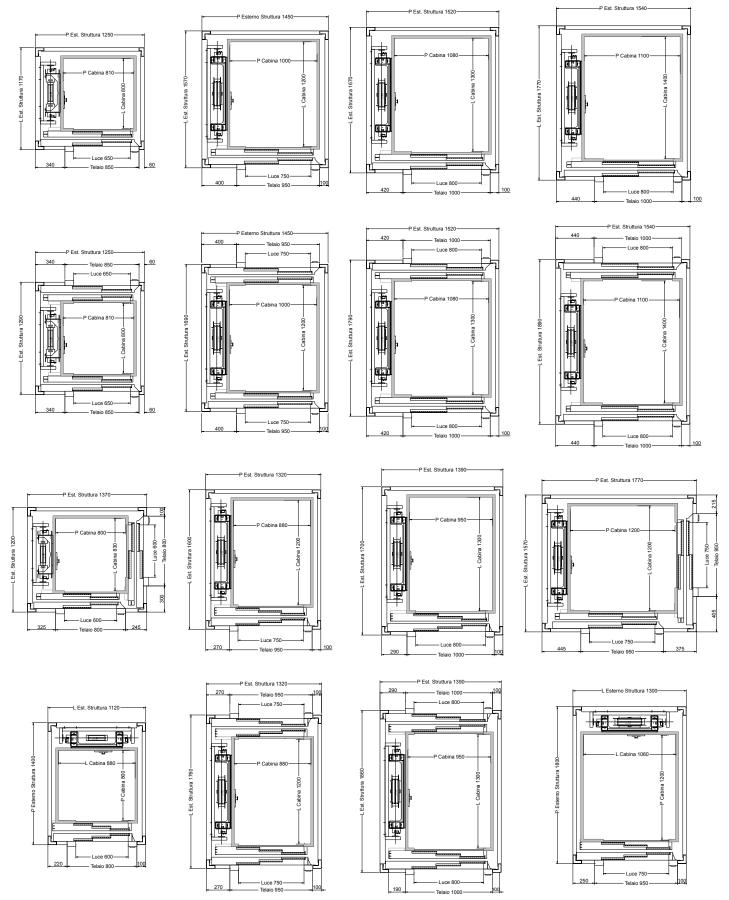

Drawings not to scale – measurements in millimetres

Elfo









Home Lift Elfo









Materials

standard

FLOORING LINOLEUM

Excellent resistance, hard wearing and easy to maintain. These materials are perfect for daily use.



Gomma a bolle grigio



0158 Tabac Grey



131 - 081 Private Black



121 - 003 Dark Brown



121 - 048 Cranberry red



121 - 155 Smoked Pearl



125 - 026 Sky Blue



bolle nera

FINISHING

PLASTIC-COATED SHEETS

These materials are heard wearing and easy to maintain, they are available for the skirting's, pushbutton panels and profiles.



F12PPS Similinox



B41SMM Blu stellato

WALLS AND PANELS

PLASTIC-COATED SHEETS

These materials are heard wearing and easy to maintain, they are available for the skirting's, pushbutton panels and profiles.



Antracite



N3PP Nero lucido



N3S Nero opaco



Legno chiaro



DL36 A Legno scuro



A32PP Bianco lucido



F41PPS Argento metallizzato



Bianco



DT29SMA Beige spatolato



B32SMA Azzurro



G28SMA



F12PPS Similinox



B41SMM



PPS1 Grigio



Avorio



B22SMA Grigio

The pictures in this brochure are a reflection of the equipment available and samples can be provided upon request. EP is not responsible for any pictorial differences between the images in this catalogue and the actual materials provided.

Materials

optional

WALLS AND PANELS

STAINLESS STEEL

Stainless steel sheet treated to ensure durability and to keep the lift looking good over the years.







"lucido"

SPECIAL STAINLESS STEEL

Stainless steel sheets coated specially to provide innovative and contemporary finishes.



SC 147



Austenit fumè



SC 916 Gold-blu



SC 111



Oro pallinato



Bronzo SB



Lino lucido



5WL lucido



SC 107 D



Quadro oro



Lino rosso



SC 422 Gold



Oro SB



Pioggia bronzo



Stripes bronzo



Dots bronzo



SC 429 Gold



SC 528 Gold



SC 400



Perla oro



Goccia blu



Pelle verde



Rete blu



Goccia rosso

The pictures in this brochure are a reflection of the equipment available and samples can be provided upon request. EP is not responsible for any pictorial differences between the images in this catalogue and the actual materials provided.

Materials optional

FLOORING GRANIT


Flooring made with quality natural materials to suit each individuals requirements.



WALLS AND PANELS

COLOR EVOLUTION

Contemporary finishes in plastic laminates including luminescence to provide a truly unique finish.

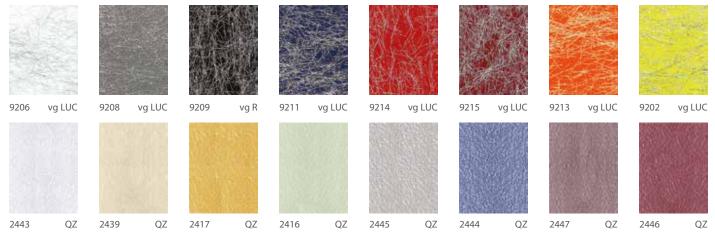

The pictures in this brochure are a reflection of the equipment available and samples can be provided upon request. EP is not responsible for any pictorial differences between the images in this catalogue and the actual materials provided.


Materials

optional

WALLS AND PANELS

COLORSINTESI

Lightweight and durable plastic laminates, available in a wide range of colours.

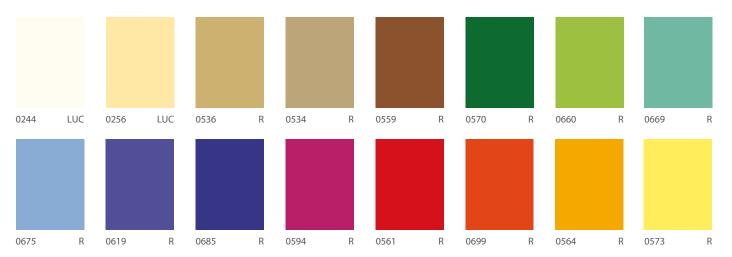

MATERIC EXPRESSION

Plastic laminates lighter and stronger, the textures of these laminates offer a nice effect and can be easily matched to steel finishes.

















WOODS

Plastic laminates lighter and stronger; faithfully reproduce the essences of the most common woods.

































The pictures in this brochure are a reflection of the equipment available and samples can be provided upon request. EP is not responsible for any pictorial differences between the images in this catalogue and the actual materials provided.

vg LUC

Elfo








Special metal structure shaft with fume glasses assembled in external cladding and panoramic stainless steel doors.

Home Lift Elfo

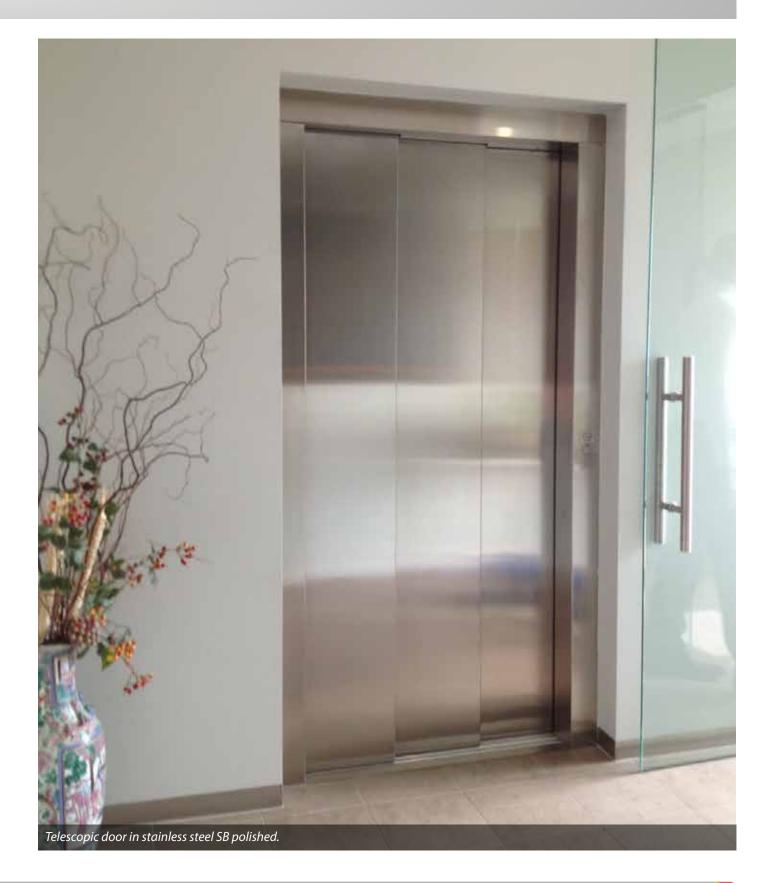

Elfo

Accessories



 $We supply most finishes to the {\it client's requirements if you have a specific request please contact us at EP and we will endeavor to accommodate you.}\\$

Home Lift **Elfo**

Accessories



We supply most finishes to the client's requirements if you have a specific request please contact us at EP and we will endeavor to accommodate you.

Landing doors

swing doors

Classic door



Semi-automatic metal door available in a plain version or with glass, available in one or two panels. Painted in the RAL range colours or coated stainless steel BA or SB

Reinforced door



Semi-automatic metal door with CISA 5 pins lock, available in the RAL range of colours.

Fire-resistant door



Semi-automatic metal door manufactured to withstand fire for a fixed period of time.

Aluminium door



Semi-automatic meta door with aluminum frame, material that maintains its physical and aesthetic properties. It is an "ecological" material as it can be completely recycled.

Villa door



Semi-automatic door with crystal made panel. The crystal glass of this door is laminated and tempered. The frame is stainless steel coated as well as the accessories.

Small window



First measure available among windows . Allows the possibility to see the car at landings .

Large window



Intermediate window dimension, allows a greater passage of light inside the car.

Glazed doors



Panoramic size window, allows a full vision of the car. This type of doors is used frequently in units with metallic structure.

Double glazed doors



Door that allows passage of very bright light, with its two separate windows. This solution is a viable alternative of the panoramic


Caspim handle



Handle for door, made of stainless steel.

Quadra handle

(optional)



Handle for door, made of stainless steel

The glass finishes available are shown on page 6

Landing doors swing doors







Elfo



Home Lift Elfo





The equipment and accessories may vary because of legal or local market requirements. The informations contained on this publication is only for exemplar purpose. EP may modify the data described in this publication for technical or commercial reasons.





E.P. Elevatori Premontati S.r.l. Via della Pavoncella, 12/14 56019 Loc Nodica - Vecchiano (PI) Partita IVA e C.F. 01129050470 Tel. +39 050 875091 Fax +39 050 8750999 R.E.A. di Pisa PI135207

Sede legale Via Querceto, 27 - 59100 Prato (PO) Capitale Sociale € 1.215.000 I.V. Reg. Imprese di Prato n.01129050470 R.E.A. di Prato PO 449750